# **Marine Physical Laboratory**

# **DURIP - Mid-Frequency Source-Receive Array**

Principal Investigator(s) William S. Hodgkiss

Supported by the Office of Naval Research Grant Number: N00014-01-1-0799

Final Report

June 2003

Approved for Public Release
Distribution Unlimited

University of California, San Diego Scripps Institution of Oceanography

Best Available Copy

20040809 102

REPO	Form Approved OMB No 0704-0188			
Public reporing burden for this collection gathering and maintaining the data ne this collection of information, including Dayls Highway, Suite 1204, Afington, V	on of information is estimated to average ed ed, and completing and reviewing suggestions for reducing this burden, t VA 22202-4302, and to the Office of Ma	e 1 hour per response, including the time for reviewing the collection of information. Send comments regardin o Washington Headquarters Services, Directorate for I anagement and Budget, Paperwork Reduction Project	Instructions, searching existing data sources, githis burden estimate or any other aspect of information Operations and Reports, 1215 Jefferson (0704-0188), Washington, DC 20503.	
1. Agency Use Only (Leave B		t Date. 3. ReportType a	nd Dates Covered.	
4.Title and Subtitle.			5. Funding Numbes.	
DURIP - Mid-Freque	N00014-01-1-0799			
6. Author(s). William S. Hodgkiss			Project No. Task No.	
7. Performing Monitoring Ag	ency Names(s) and Addres	ss(es).	8. Performing Organization	
University of California, Sa Marine Physical Laborator Scripps Institution of Ocea 291 Rosecrans Street San Diego, CA 92106	ry	· ·	Report Number.	
9. Sponsoring/Monitoring Ag Office of Naval Resear Department of the Nav 800 North Quincy Stree Arlington, VA 22217-5 Atten: CDR J. Tague	rch y et	ss(es).	10. Sponsoring/Monitoring Agency Report Number.	
11. Supplementary Notes.				
12a. Distribution/Availability		n is unlimited.	12b. Distribution Code.	
13. Abstract (Maximum 200	0 words).		,	
A mid-frequency (~85 enhanced operation of "mirror") concepts. The autonomous fashion the equipment needed for	O Hz) source-receive offboard active survene source-receive arranus facilitating single system fabrication was	array has been fabricated for relilance systems using phase cay and its companion surface be ship operations for carrying or as supported by this DURIP. Tounder grant N00014-01-1-079	onjugation (time reversal uoy operate in an ut experimental work. The 'he personnel support for	
14. Subject Terms.	15. Number of Pages.			
mid-freuqncy source	array, transducers		16. Price Code.	
17. Security Classification of Report. Unclassified				

## DURIP: Mid-Frequency Source-Receive Array N00014-01-1-0799

W.S. Hodgkiss

Marine Physical Laboratory
Scripps Institution of Oceanography
La Jolla CA 92093-0701

#### **Abstract**

A mid-frequency (~850 Hz) source-receive array has been fabricated for use in demonstrating enhanced operation of offboard active surveillance systems using phase conjugation (time reversal "mirror") concepts. The source-receive array and its companion surface buoy operate in an autonomous fashion thus facilitating single ship operations for carrying out experimental work. The equipment needed for system fabrication was supported by this DURIP. The personnel support for system fabrication was provided separately under grant N00014-01-1-0794.

### **Time Reversal Mirror Concept**

A phase conjugate mirror time reverses the incident signal precisely returning it to its original source location. This phenomenon occurs independent of the complexity of the medium. The time reversal process can be accomplished by the implementation of a retransmission procedure (see Fig. 1). A signal received at an array is time reversed and retransmitted. A source array excited by the phase conjugated (time reversed) signal received at the array position will focus at the position of the radiating source. The medium fluctuations are embedded in the received signal so that if retransmission can occur on a time scale less than the dominant fluctuations, the medium variability will be eliminated since one back propagates and "undoes" the variability.

### Source-Receive Array System Description

The mid-frequency source-receive array system is an enhancement of existing electronics and surface buoy hardware from a previously-funded (FY98) DURIP which focused on high frequencies (~3.5 kHz). The existing high frequency system has been upgraded so that it can operate at both 850 Hz and 3.5 kHz.

The high frequency phase conjugation array consists of a vertical array of 29 source/receive transducers operating nominally in the 3-4 kHz band, an underwater pressure case containing the source/receive electronics, and a surface buoy providing battery power, system control, and wireless local area network (LAN) connectivity (see Fig. 2)) [1]. The upgraded system has the same general configuration with an array of 850 Hz transducers replacing the array of 3.5 kHz transducers.

## Mid-Frequency Source-Receive Array Fabrication

Fabrication of the mid-frequency source-receive array involved acquiring mid-frequency (~850 Hz) transducers to populate the 29-element array (plus spares), calibrating their transmit (TVR) and receive (FFVS) characteristics, and making appropriate modifications to the existing electronics packaging inside the pressure case to accommodate new transformers enabling operation of the power amplifiers at both 850 Hz and 3.5 kHz. The fundamental design of the source/receive electronics in the pressure case and the surface buoy hardware have remained unchanged and are described in detail in [1].

Note that an integrated array cable with molded take-outs was included in the original proposal. Permission was requested to substitute the purchase of a new steel armored umbilical cable connecting the pressure case and surface buoy. Testing of the existing umbilical cable showed it to be unreliable. In place of the integrated array cable, the original approach of using individual coaxial cables (bundled with spiral wrap) connecting the transducers to the pressure case was continued.

A significant amount of effort was spent calibrating the transducers and interacting with the transducer manufacturer (Marine Acoustics Limited). Although a standard transducer in their product line, the MAL Sonoflex 850 transducers proved problematic. The original set of transducers which were delivered failed their acceptance test with substantial deviations from the advertised specifications in both source level and resonance frequency. MAL was responsive and subsequently supplied a replacement set of transducers. The measured calibration characteristics of these transducers (both transmit (TVR) and receive (FFVS)) are provided in Figs. 3-6. Note the substantial variation in resonance characteristics across the set of transducers at a common depth (Figs. 3-4) and for a given transducer as a function of depth (Figs. 5-6). At the nominal TVR specification of 131 dB re 1  $\mu$ Pa/V, each transducer of the mid-frequency source-receive array has a maximum output source level of 189 dB re 1  $\mu$ Pa.

The mid-frequency transducers were assembled into a source-receive array and taken to sea during the FAF-03 (Focused Acoustic Fields 2003) experiment sponsored separately by the Office of Naval Research and carried out jointly with the NATO SACLANT Undersea Research Centre. Fig. 7 shows the transducers configured for in-situ depth testing early in FAF-03. Subsequently, the source-receive array was deployed as a 78 m aperture vertical array. Shown in Fig. 8 are the transducers arranged for deployment on the back deck of the R/V Alliance.

The mid-frequency source-receive array did operate effectively during FAF-03. Results from carrying out time reversal focusing over a 10 km range for a period of 55 min are shown in Fig. 9.

#### References

[1] W.S. Hodgkiss, J.D. Skinner, G.E. Edmonds, R.A. Harriss, and D.E. Ensberg, "A high frequency phase conjugation array," Proc. OCEANS 2001: 1581-1585 (2001).

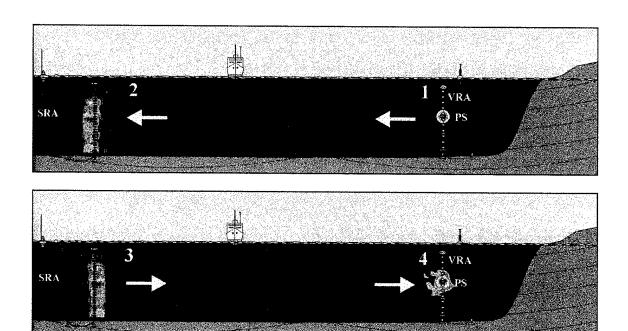


Fig. 1. Time reversal process implemented by a retransmission procedure.

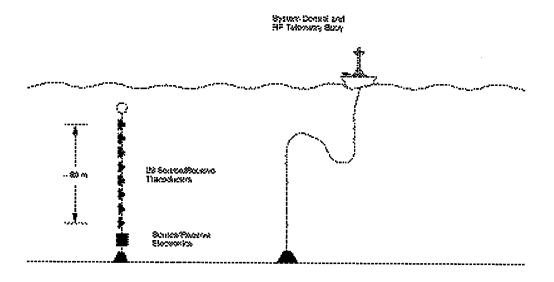


Fig. 2. Phase conjugation array system consisting of 29 source/receive transducers spanning an aperture of 78 m, an underwater pressure case containing the source/receive electronics, and a surface buoy providing battery power, system control, and wireless local area network (LAN) connectivity.

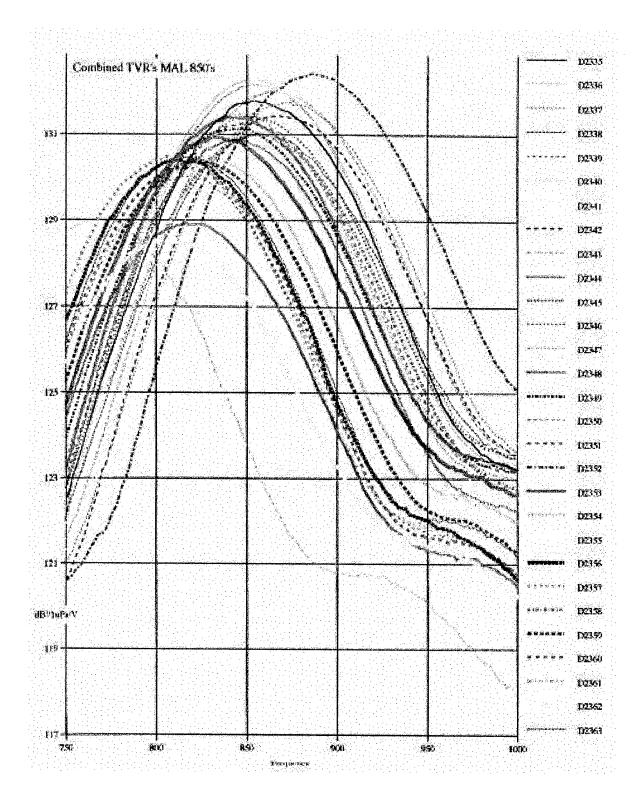


Fig. 3. Measured TVR characteristics of the mid-frequency transducer set at 12 m depth.

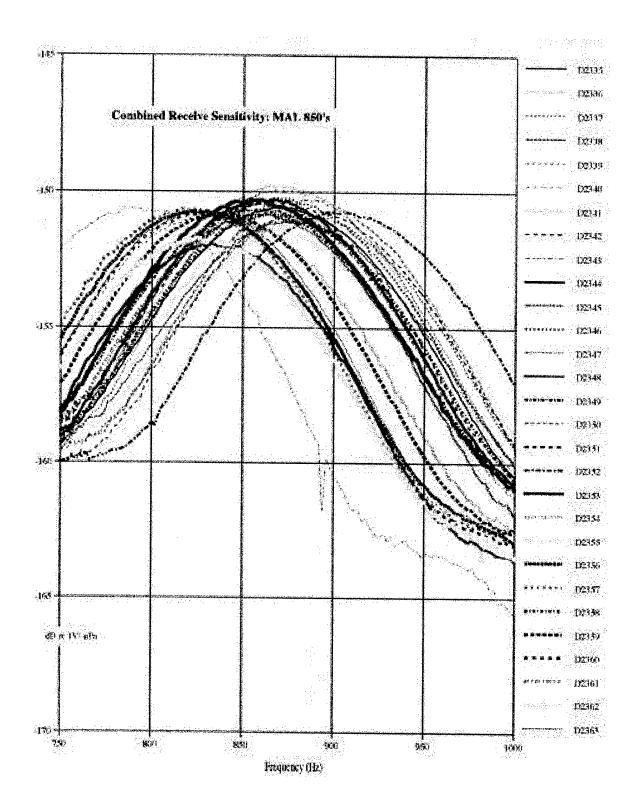


Fig. 4. Measured FFVS characteristics of the mid-frequency transducer set at 12 m depth.

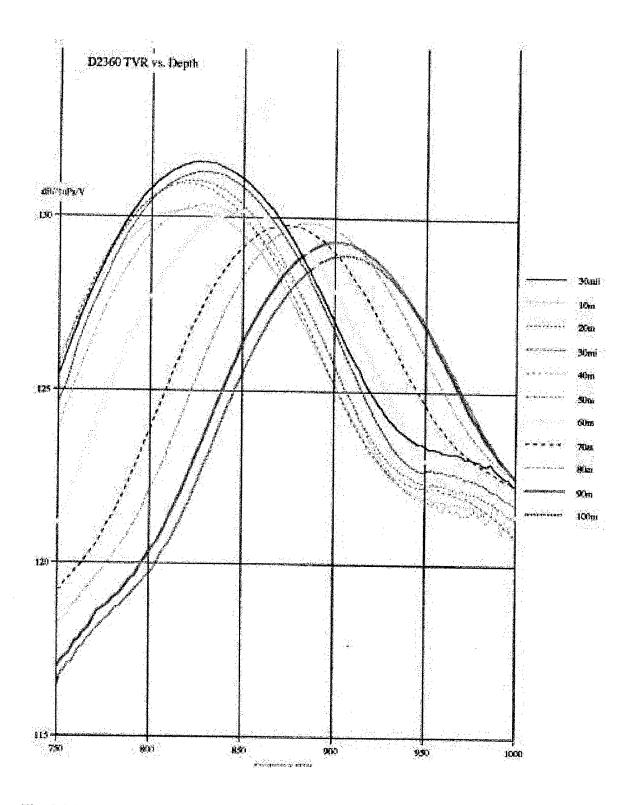


Fig. 5. Measured TVR characteristics of transducer D2360 vs. depth.

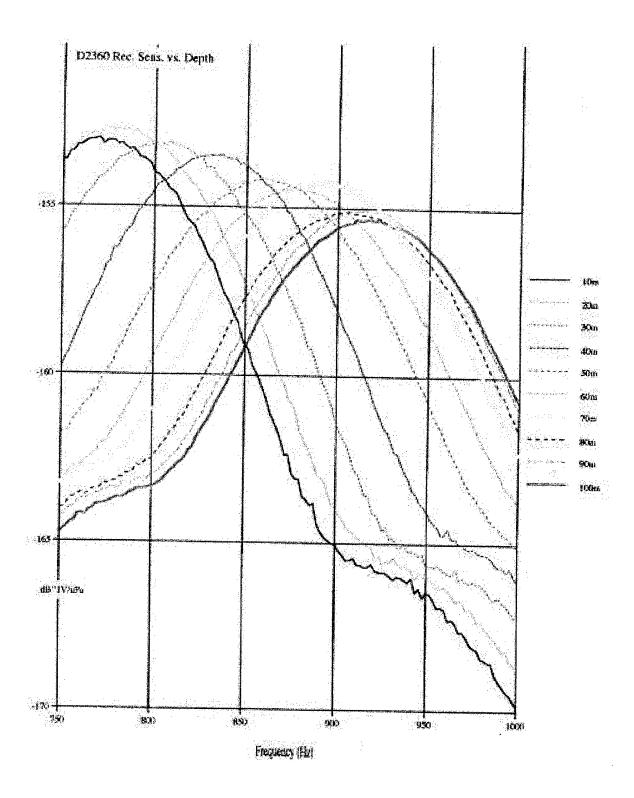


Fig. 6. Measured FFVS characteristics of transducer D2360 vs. depth.

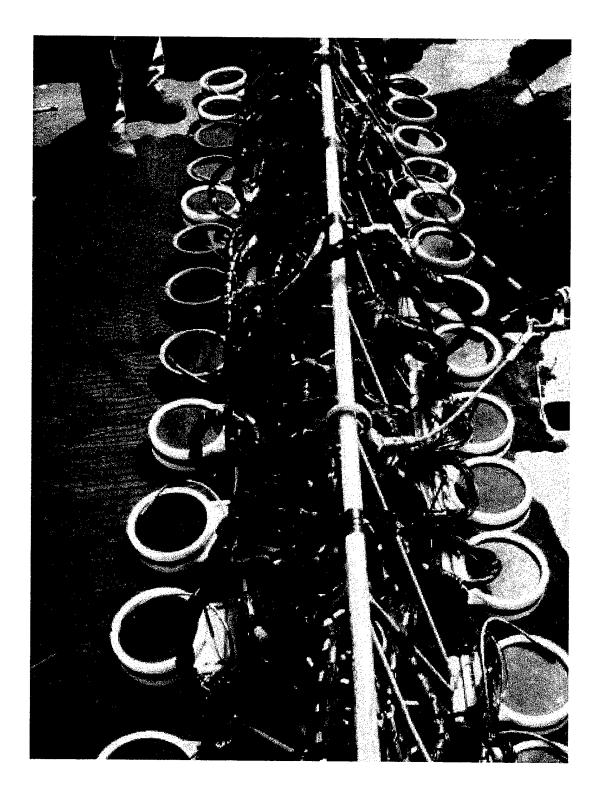


Fig. 7. Mid-frequency transducers configured for in-situ testing early in FAF-03.



Fig. 8. Mid-frequency transducers on the back deck of the R/V Alliance during FAF-03 in preparation for deployment as a 78 m aperture vertical source-receive array.

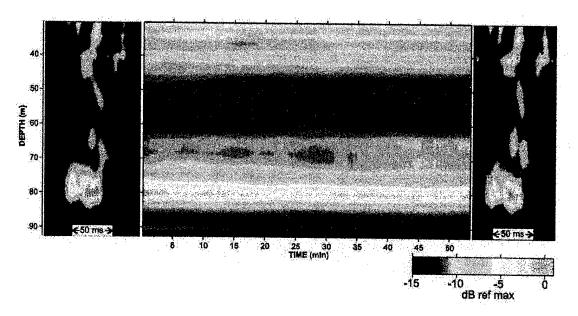


Fig. 9. Time reversal focusing during FAF-03 at  $850~\mathrm{Hz}$  over a  $10~\mathrm{km}$  range for a period of  $55~\mathrm{min}$ .

FUND 27018A

Agency DN OFFICE OF NAVAL RESEARCH (ONR)

Grant Number
Funding Amount
Grant Dates
Budget Dates
Overhead Rate

27018A

100014-01-1-0799
\$ 161,021.00
04/01/2001-12/31/2002
04/01/2001-12/31/2002
04/01/2001-12/31/2002

Overhead R	late	M130FG	MODIFIED-FED	ERAL-GRANT-	13.0%			
Total Salari	es and E	Benefits:						2,703.50
Sub 3 - Supplies And Expense 8,6								
Fabrication	n of Mic	d-Frequen	cy Source Arr	ay				
MPLWH62	533	649610			Port Plastics 01	3034261	2A903285	62.00
MPLWH62	533	649610			Port Plastics 01	3034261	2A903285	800.00
MPLWH62	533	649610		4/4/02	MCMASTER-CARR SUPPL	Y COMP 052450259	2A870575	17.18
MPLWH62	533	649610		5/9/02		96454IN	10209709	2,507.88
MPLWH62	533	649610	72730267	11/8/02	ONESOURCE DISTRIBUTO	RS IN 721336001	2A935719	41.38
MPLWH62 MPLWH62	533 533	649610	72730352	11/8/02	AMERICAN RIGGING & SU	IPPLY 005059201	2A935714	668.05
MPLWH62	533	649610 649610	72732570		MCMASTER-CARR SUPPL		2A935716	17.18
MPLWH62	533	649610	72734408 72742655			000003053	2A935723	30.17
MPLWH62	533	649610	72748451	12/16/02	YALE CORDAGE, INC	0148460	2A935718	1,323.47
MPLWH62	533	649610	72748451		YALE CORDAGE, INC	000091492	2A935720	153.87
MPLWH62	533	649610	72748785		SOUTH BAY CABLE	000091492 000050737	2A935720	1,985.40
MPLWH62	533	649610	72748785		SOUTH BAY CABLE	000050737	10215090	323.25
MPLWH62	533	649610	72754700	1/27/03		01538IN	10215090 10217988	25,356.13
MPLWH62	533	649610	72760359		NEWARK ELECTRONICS	007044700	2A949230	5,844.36
MPLWH62	533	649610	FMDB0113		MARINE ACOUSTICS LIMI		10203711	560.51 21,792.75
MPLWH62	533	649610	FMDB0115		MARINE ACOUSTICS LIMI		10203711	1,634.46
MPLWH62	533	649610	FMDB0317		MARINE ACOUSTICS LIMIT		10203711	64,297.80
MPLWH62	533		FMDB0318		MARINE ACOUSTICS LIMI		10203711	4,822.34
MPLWH62	533		FRMPLD48	2/28/02 1	MPL SHOP LABOR RECHA	ARGE	FAB 533	46.00
MPLWH62	533		FRMPLD51		MPL SHOP LABOR RECHA		FAB 533	2,070.00
MPLWH62	r-b-ta	649610	NIMPLAGY	10/30/02	ENPET AIR-SEA FORWAR	DERS, INC. 114		2,387.71
Iotaii	гарпсат	ion of Mia-	Frequency Sour	rce Array				136,741.89
Fabrication	of Upg	rade to S	ource Array E	ectronics				
MPLWH62	564	649610	72704745	9/5/02	Pacific Transformer Corp	000046883	2A925614	100 41
MPLWH62	564	649610	72706911	9/10/02		12602289	2A925616	186.41 43.15
MPLWH62	564	649610	72706911			12602289	2A925616	556.80
MPLWH62	564	649610	72707045		NEWARK ELECTRONICS	006488974	2A925617	118.80
MPLWH62	564	649610	72708815	9/16/02 F	Pacific Transformer Corp	000047191	2A935705	13.02
MPLWH62	564	649610	72708815	9/16/02 F	Pacific Transformer Corp	000047191	2A935705	168.00
MPLWH62	564	649610	72710958			12641208	2A935709	10.63
MPLWH62 MPLWH62	564 564	649610	72710958			12641208	2A935709	137.20
MPLWH62	564	649610 649610	72711404		NEWARK ELECTRONICS	006496864	2A925618	168.46
MPLWH62	564	649610	72720437 72726083	10/15/02	NEWARK ELECTRONICS	006623377	2A925619	27.28
MPLWH62	564	649610	72726083	10/28/02 F	Pacific Transformer Corp	000047731	10216495	599.99
MPLWH62	564	649610	72741033	10/20/02 F	Pacific Transformer Corp DIGI-KEY 4541 0		10216495	7,803.95
MPLWH62	564	649610	72741033			12943598	2A949231	31.42
MPLWH62	564	649610	72741743		ALLIED ELECTRONICS, IN	12943598	2A949231	405.38
MPLWH62	564	649610	72741795	12/12/02 N	NEWARK ELECTRONICS	006833552	2A925621	127.57
MPLWH62	564	649610	72742042			12956908	2A949230 2A949231	900.48
MPLWH62	564	649610	72743253			12996182	2A949231	28.06 4.64
MPLWH62	564	649610	72743253			12996182	2A949231	59.89
MPLWH62	564	649610	72744478	12/19/02 S	SIERRA CIRCUITS, INC.	000115163	2A949229	1,832.07
MPLWH62	564		FRMPLD56	8/31/02 M	IPL SHOP LABOR RECHA	RGE - AUGUST 02	FAB 564	127.50
MPLWH62	564	649610	FRMPLE60	11/30/02 M	APL SHOP MATERIAL REC	HARGE	FAB 564	626.48
			ade to Source /	Array Electron	ics			13,977.18
TOTAL EQUII	PMENT C	COSTS						150,719.07
TOTAL DIREC	CT COST	S						162,064.57
NDIRECT COST 13% OF MTDC						1,474.92		
TOTAL PROJECT COSTS					163,539.49			
N00014-01-1-0799						161,021.00		
CONTRIBUTION BY UNIVERSITY					2,518.48			

#### **ONR/MPL REPORT DISTRIBUTION**

t

Office of Naval Research
Department of the Navy
Ballston Tower One
800 North Quincy Street
Arlington, VA 22217-5660
Atten: CDR J. Tague

Regional Director (1)
ONR Detachment
San Diego Regional Office
4520 Executive Drive, Suite 300
San Diego, CA 92121-3019

Commanding Officer (1)
Naval Research Laboratory
4555 Overlook Avenue, S.W.
Attn: Code 2627
Washington, D.C. 20375-5320

Defense Technical Information Center (4) 8725 John J. Kingman Road Suite 0944 Ft. Belvoir, VA 22060-6218